


Rev. no. Rev. description

Legend



5no. Existing Lime trees to be removed



Existing semi-mature Lime trees to be retained, mulched at base with fine bark and soil enricher mix to 50mm depth, min 2m Ø



Ground to be rotovated with 50mm average depth soil enricher, peat free compost (1080m²)




Planting beds prepared for ornamental grass planting, beds prepared to 300mm depth, including addition of 50mm peat free soil enricher rotovated in.




Existing daffodil planting



Proposed location for sculpture with gravel surface



Include for existing grass removal This drawing to be read in conjunction with drawing no T399-114 All area to be mulched on completion with 10cm pebble gravel, 50mm depth

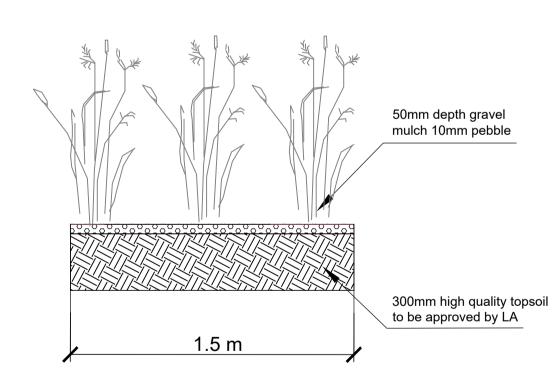

Ornamental grass planting Scale 1:20 (A1)



Limerick City and County Council
Landscape Designs and Maintenance Plans
for Limerick City Roundabouts

Drg Title: 4 - Roxborough Roundabout Hardworks Tender Stage

Drg. No.: Scale: Date: 2020, June 24th Drawn By: MW Checked by: DR

12 Barrington Street Tel.: 061 59 00 01 Limerick Mob.: 087 314 5 70 www.daveryan.ie Email: info@daveryan.ie

DAVE RYAN