










Rev. no.	Rev. description	Date	Sign	Chk'd

Legend

-  5no. Existing Lime trees to be removed
-  Existing semi-mature Lime trees to be retained, mulched at base with fine bark and soil enricher mix to 50mm depth, min 2m Ø
-  Band 1: existing daffodil with additional with Proposed Grape Hyacinth and Crocus mix bulb planting, see plant list
-  Band 2 bulb planting mix, see plant list
-  Band 3 bulb planting mix, see plant list
-  Band 4 bulb planting mix, see plant list
-  Proposed ornamental grasses planting, see also plant list
-  Proposed location for sculpture
-  Existing underground services (approximate locations). Contractor responsible for locating and screening for services before starting work on site

Notes:
 This drawing to be read in conjunction with drawing no T399-114-H
 All area to be mulched on completion with 10cm pebble gravel, 50mm depth

Plant List

	Name	Quality	Quantity	feb	mar	apr	may	jun	jul	aug	sep	oct	nov
Band 1	Large Flowering Dutch Crocus Mix Maastricht	9/10cm	25,000										
	Muscari Early Giant	9/10cm	25,000										
Band 2	Camassia leichtinii	14/+cm	5,300										
	Anemone coronaria De Caen	8/+cm	31,800										
	Allium sphaerocephalon	6/+cm	21,200										
	Stipa tenuissima	2L	1,017										
	Nectaroscordum siculum	10/+cm	8,900										
Band 3	Allium atropurpureum Giganteum	20/+cm	160										
	Calamagrostis Karl Foerster	2L	190										
	Crococsmia Lucifer	10/+cm	4,450										
Band 4	Crococsmia George Davison	10/+cm	4,450										
	Liatrix spicata purple	14/+cm 50% P9 50%	405 2,700										
	Molinia caerulea 'Heidebraut'	2L	55										
	Stipa gigantea	2L	30										


Notes:
 All plants to be locally sourced and Irish grown where possible. Inspection of quality at source of supply will be undertaken
 Plants should be in compost with 9 month slow release fertiliser
 Plants to be well established in pots
 Plants need to be hardened off before supply
 Plants to be free of pest, disease and vine weevil



Client: Limerick City and County Council
 Project: Landscape Designs and Maintenance Plans for Limerick City Roundabouts
 Drg Title: 4 - Roxboro Roundabout Softworks
 Stage: Tender Stage
 Drg. No.: T399-114
 Scale: 1:100@A1
 Date: 2020, June 24th
 Drawn By: MW Checked by: DR



12 Barrington Street Limerick
 www.daveryan.ie
 Tel: 061 59 00 01
 Mob.: 087 314 5 70
 Email: info@daveryan.ie

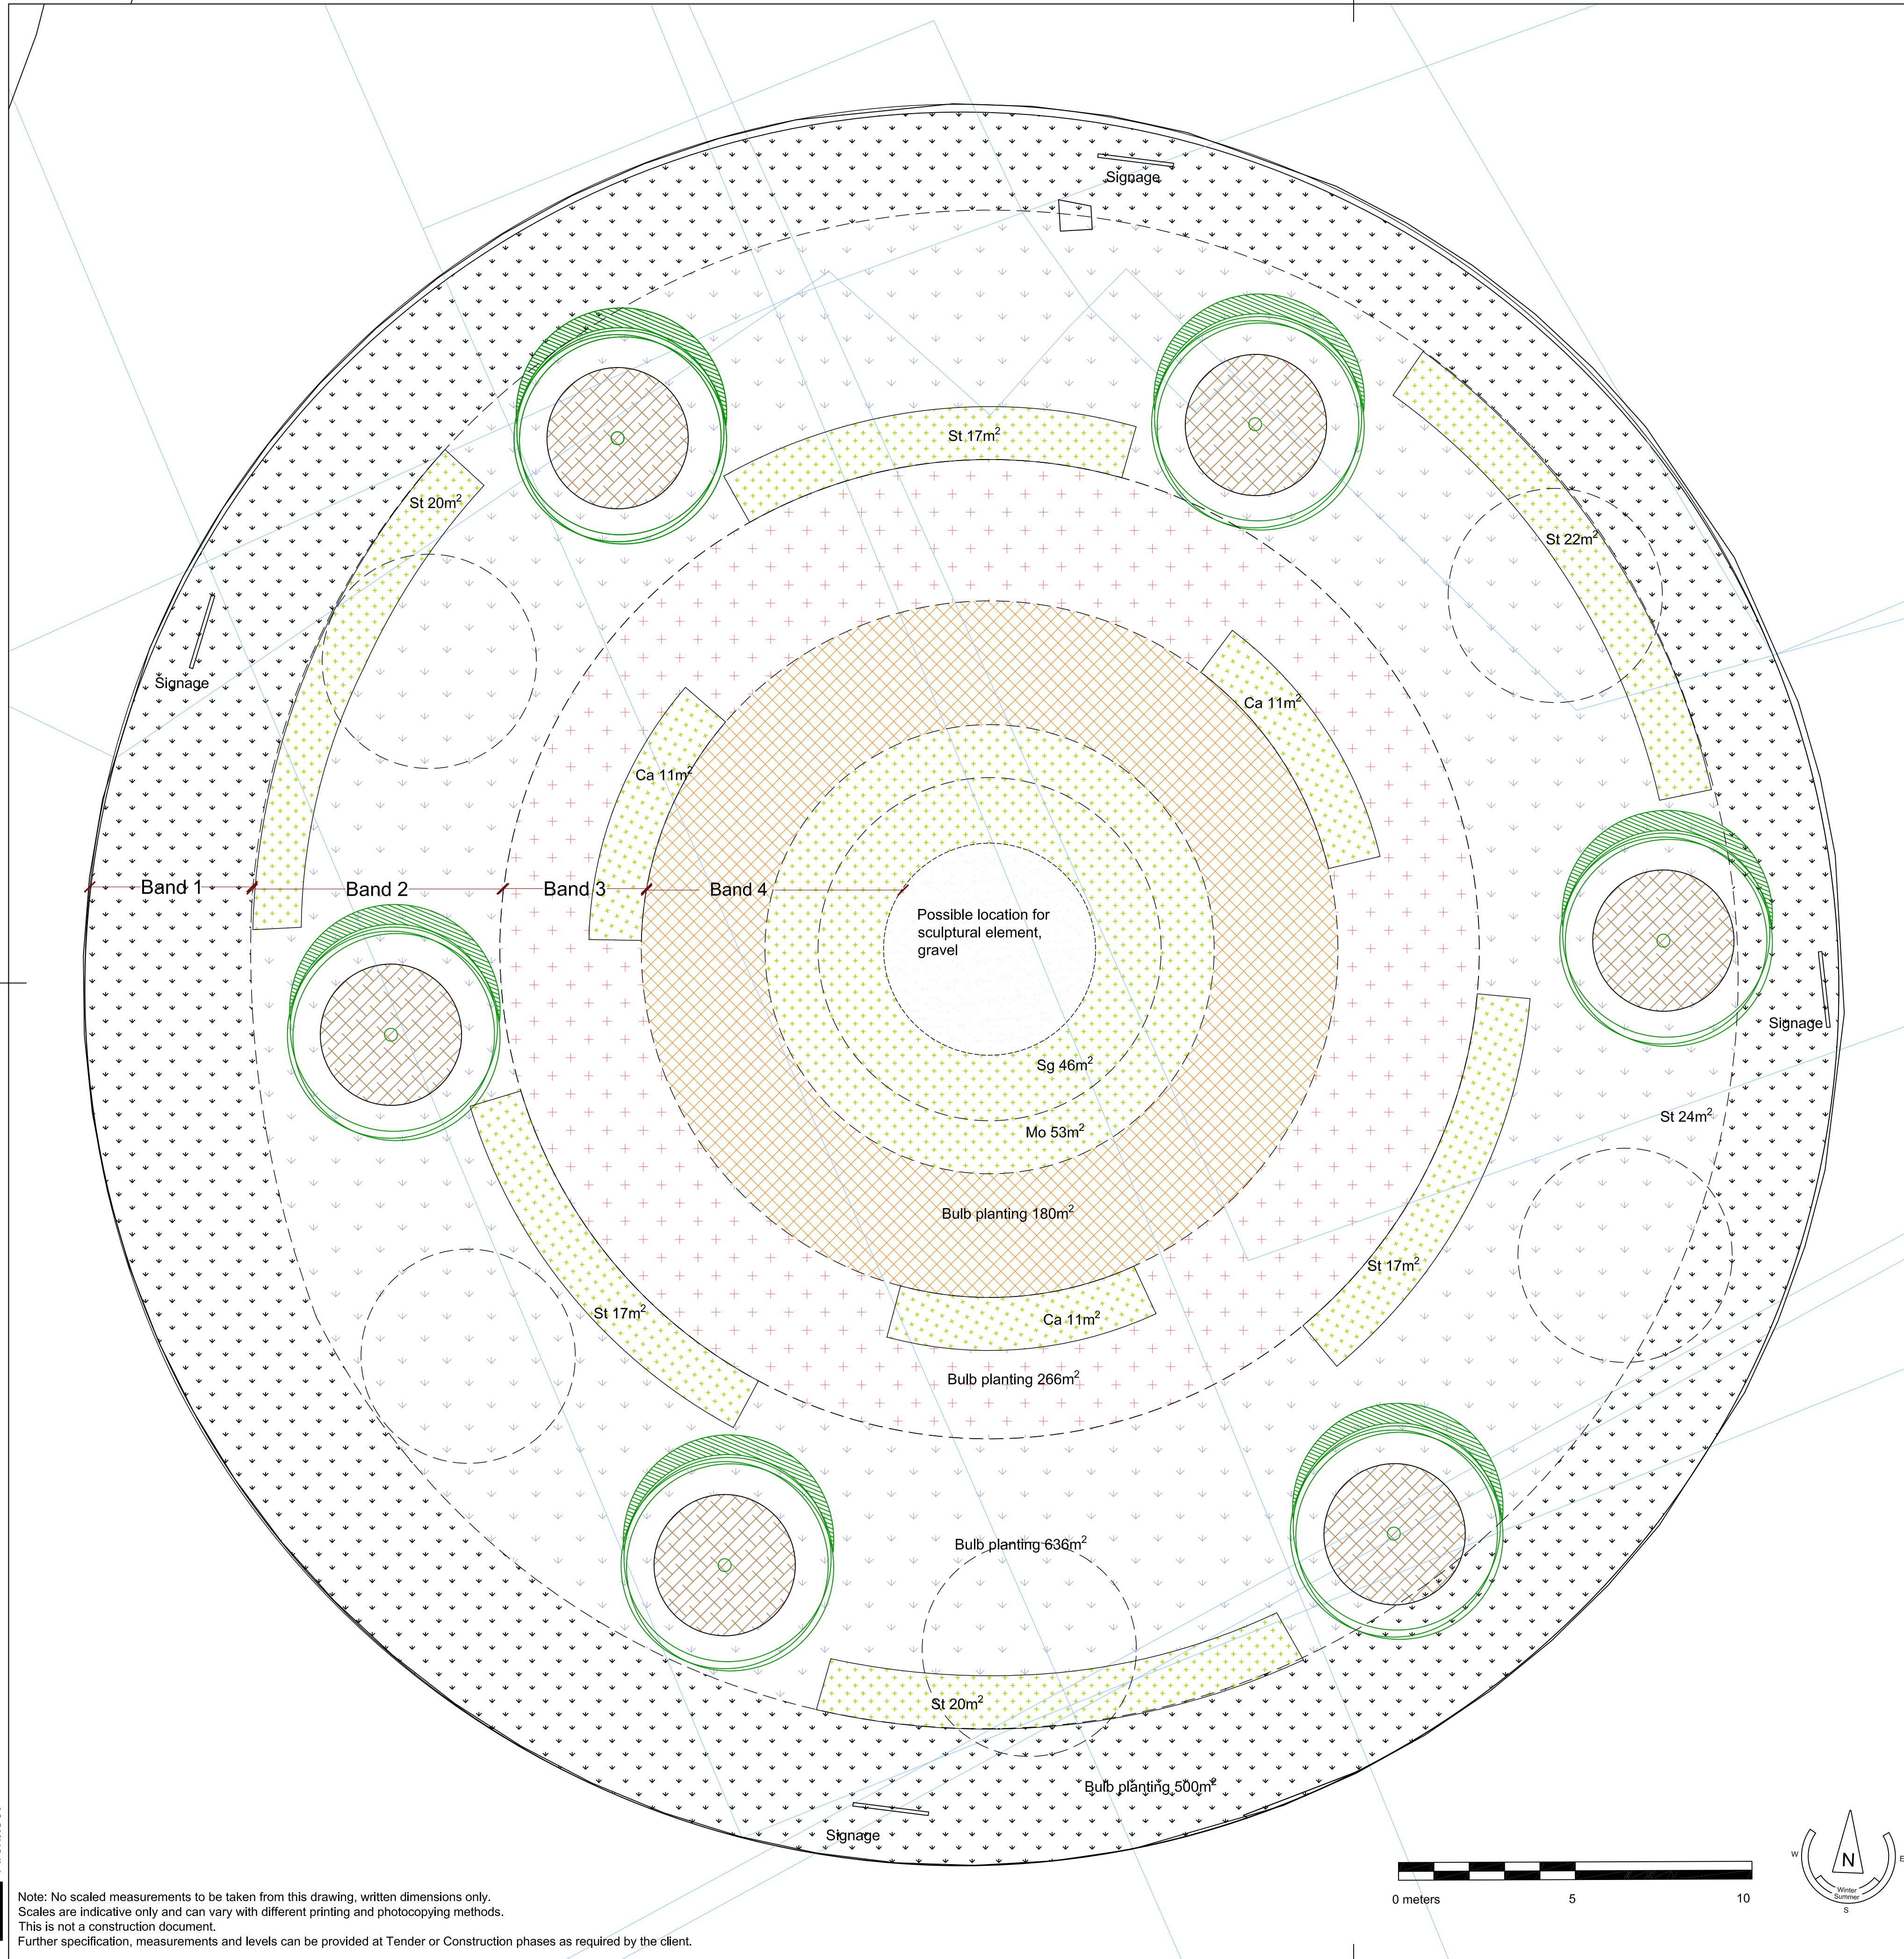

Registered Landscape Architect
 FILE: CAUSERS\MARIBANNA\DAVE RYAN\DAVE RYAN - TENDER_DWG\LOGO51394-TL_ROXBORO.DWG PLOTTED: 11/01/2020 10:15 BY: USER: MARIBANNA

Note: No scaled measurements to be taken from this drawing, written dimensions only.
 Scales are indicative only and can vary with different printing and photocopying methods.
 This is not a construction document.
 Further specification, measurements and levels can be provided at Tender or Construction phases as required by the client.